

06/04-03

Data sheet and connections

HKO High-Power-Constant-Current-Source Type: HKO1000
for 3 Watts **Luxeon Stars**
and other applications with **1000-mA- High-Power-LEDs**



HKO1000 - HIGH-POWER-CONSTANT-CURRENT-SOURCE 1000 mA

for safe operation of 3 watts Luxeon LEDs at highest efficiency

High efficiency and very little heat is achieved by modern switching-technology. The use of special amplifiers guarantees precise and constant output current. Very small dimensions, low weight and high reliability through SMT-technology (surface mounted components) .Every HKO is electronically tested.

Technical data 1000-mA-version:


- Startup ca. 6,8 Volt (for one 3 watts LED)
- Drop: ca. 3,5 Volts
- Maximum input voltage: 35 Volt DC (max.)
- Output: protected against short circuit
- Output current: 1000 mA constant
- Input: protected against confusion of the poles
- Tolerance < 3%
- Efficiency: between 75% and 90% depending on the number of LEDs
- Thermal protection
- Working temperature range: -40°C to +85°C (degrees Centigrade)

The circuit can drive with constant current up to 10 High-Power Leds in white, blue or green, or up to 16 High-Power Leds in red , amber or orange, depending on input voltage.
The circuits backside consists of tin-plated copper to support better heat management. It is connected with -IN, please take care when mounting, you should use Cooltape-pads or similar for isolation.The constant current-source should be cooled.Device should be cooled. It is recommended to use Cooltape-pads and a SK452 heatsink, it is also possible, to mount it on a metal-surface etc..

Printed circuit board:


New dimensions: 23 mm x 23 mm, 7 mm high
Connections: soldering pads
Weight: ca. 4 grams
Material: FR4, glass/epoxy
Backside: copper, tin-plated, connected with - IN

Connections:

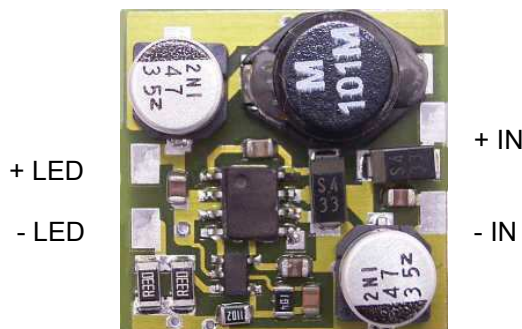

Shutdown- Pin: At the Shutdown- Pin is a soldering Pad that can be used for external controlling (e.g. by using our "dimled" to control the brightness) independent auf your main power supply.(TTL-compatible).

Shutdown-Pin:
See mark.



Attention: NEVER connect „-IN“ and „-Led“!!! Do not switch output side, switch input side only.

Available versions:

HKO100 (100mA), HKO150 (150mA), HKO350 (350mA), HKO385 (385mA), HKO400 (400mA), HKO500 (500mA), HKO700 (700mA), HKO750 (750mA), HKO1000 (1000mA), HKO1050 (1050mA), HKO1400 (1400 mA), HKO1500 (1500mA).

-date: 012/05-alterations preserved-
A1W® is a registered trademark of Alois Wolf

homepage: <http://www.constant-current.com> e-mail: info@A1W.de