


03/05-10

KONLED10DC 10-channel constant-current source

Datasheet and connecting-plan

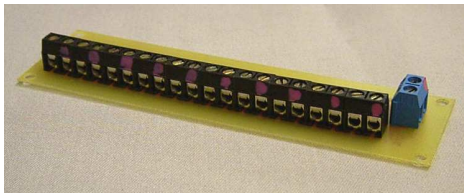

KONLED10DC

10-channel constant-current source
for light-emitting diodes (LEDs)

Safe supply for your LEDs!
Easy connection without soldering
Screw terminals with wire-protection.

Dimensions: ca. 34 mm (W) x 13 mm (H) x 120 mm (L)
Weight: ca. 30 grams


Technical data:

Outputs: 10 terminals, 2-poles each
Output standard: 20 mA DC
Input: 5-40 V DC
Voltage-drop : ca. 3 V

Constant-current sources for direct current.
Connecting-terminals with wire-protection (use simple screwdriver)
The output-current is precisely stabilized.
Thermal protection
Protected against confusion of the poles up to 40 volts!
Precision by integrated circuits
Tolerance < 3% over the whole voltage-range.
Every constant-current source ist electronically tested.
4 holes for M3-screws
Blue terminal = Input
Black terminals = outputs

Connecting-plan:

Outputs: red dot (right) marks the +-pole, left side of each terminal ist the minus-pole

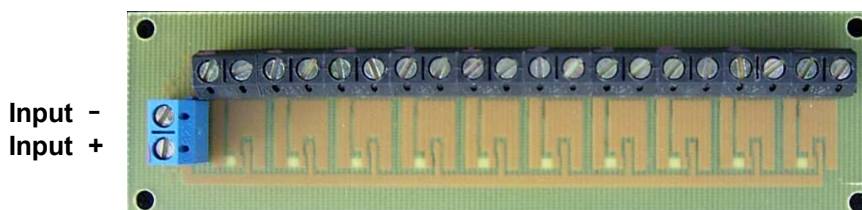

(indication on the solder-side)

Available versions on request:

2 mA, 5 mA, 10 mA, 30 mA, 40 mA, 50 mA, 60 mA, 70 mA

-date 03/05- -alterartions preserved-

A1W® is a registered trademark of telefix elektronik wolf westerburg GmbH
Homepage: <http://www.A1W.de> E-Mail: info@A1W.de